


## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification 5 :</b>  <b>B26B 21/22</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 93/10947</b>  <b>(43) International Publication Date:</b> 10 June 1993 (10.06.93)
<b>(21) International Application Number:</b> PCT/GB92/02169 <b>(22) International Filing Date:</b> 25 November 1992 (25.11.92)  <b>(30) Priority data:</b> 9125261.9                   27 November 1991 (27.11.91) GB 9222984.8                   3 November 1992 (03.11.92) GB  <b>(71) Applicant (for all designated States except US):</b> THE GILLETTE COMPANY [US/US]; Prudential Tower Building, Boston, MA 02199 (US).  <b>(72) Inventor; and</b> <b>(75) Inventor/Applicant (for US only) :</b> GILDER, Bernard [GB/GB]; 51 Lincoln Gardens, Twyford, Berkshire RG10 9HU (GB).		<b>(74) Agent:</b> LERWILL, John; A.A. Thornton & Co., Northumberland House, 303-306 High Holborn, London WC1V 7LE (GB).  <b>(81) Designated States:</b> AT, AU, BB, BG, BR, CA, CH, CS, DE, DK, ES, FI, GB, HU, JP, KP, KR, LK, LU, MG, MN, MW, NL, NO, PL, PT, RO, RU, SD, SE, UA, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, SN, TD, TG).  <b>Published</b> <i>With international search report.</i>

**(54) Title:** RAZORS**(57) Abstract**

A safety razor comprises a blade unit (2) mounted on a handle (1) for pivotal movement in one direction from a rest position, the pivot axis (C) being arranged to underly the guard surface (10). In the rest position, the entire handle is disposed forwardly of a plane containing the trailing edge of the guard surface. The handle is pivoted to the blade unit by connection pieces (20; 30) having stub axles (26) engaged in apertures (18) in the blade unit, and edges (28) bearing against cam faces (16) on the blade unit to urge the blade unit to the rest position, the connection pieces being carried by wings (20; 30) either acted upon by springs (24) or having a resilient form.

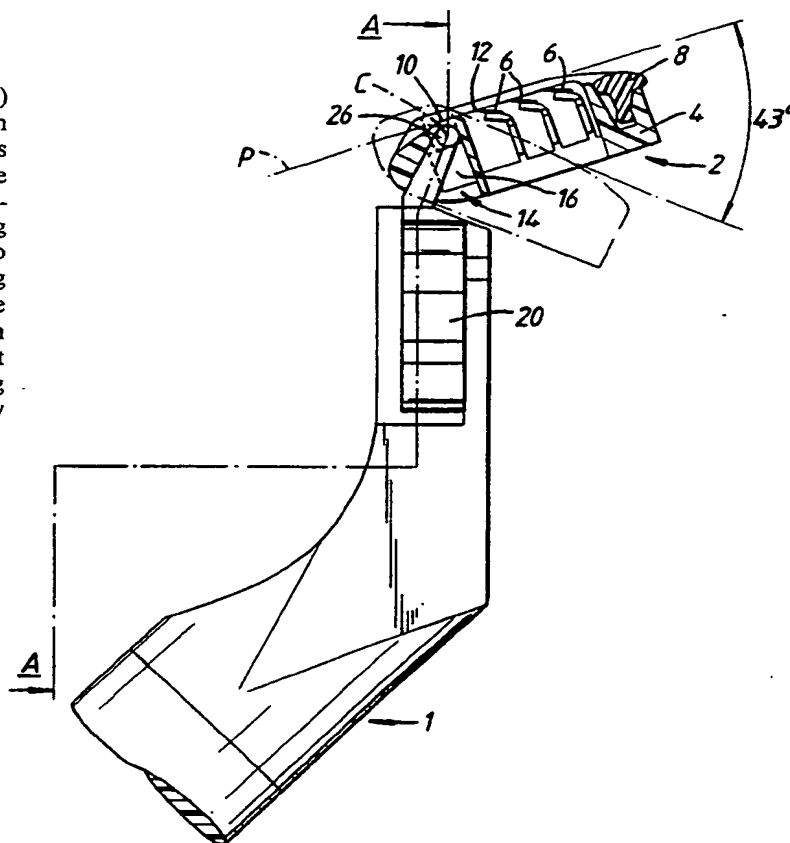

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FR	France	MR	Mauritania
AU	Australia	GA	Gabon	MW	Malawi
BB	Barbados	GB	United Kingdom	NL	Netherlands
BE	Belgium	GN	Guinea	NO	Norway
BF	Burkina Faso	GR	Greece	NZ	New Zealand
BG	Bulgaria	HU	Hungary	PL	Poland
BJ	Benin	IE	Ireland	PT	Portugal
BR	Brazil	IT	Italy	RO	Romania
CA	Canada	JP	Japan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SK	Slovak Republic
CI	Côte d'Ivoire	LJ	Liechtenstein	SN	Senegal
CM	Cameroon	LK	Sri Lanka	SU	Soviet Union
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	MC	Monaco	TC	Togo
DE	Germany	MD	Madagascar	UA	Ukraine
DK	Denmark	ML	Mali	US	United States of America
ES	Spain	MN	Mongolia	VN	Viet Nam
FI	Finland				

- 1 -

RAZORS

This invention relates to razors, and is particularly concerned with a safety razor of the kind comprising a handle and a blade unit mounted on the handle with the capability to pivot during shaving to adjust itself to the contours of the surface being shaved, there being spring means acting between the handle and blade unit to urge the blade unit to a "rest" position.

In known razors of this kind the pivot axis, as seen in a direction perpendicular to a plane containing the guard surface and the edge of the blade adjacent to the guard, is located between the guard and the cap of the blade unit, i.e. generally behind the blade or blades, and the blade unit is arranged to pivot in both directions from its rest position. With such arrangements the handle tends to impede flow of water through the blade unit for rinsing away soap and shaving debris.

In accordance with the present invention there is provided a safety razor comprising a blade unit including a guard and at least one blade, and a handle mounting the blade unit for pivotal movement in one direction only from a rest position, characterised in that the pivot axis underlies the guard surface as seen in a direction normal to a plane containing the guard surface and the edge of the adjacent blade.

With the pivot axis located to underly the guard surface, the force of the blades against the skin during shaving will be mainly influenced by the spring means which opposes pivotal displacement of the blade unit from the rest position and applies a restoring force to return the blade unit to the rest position when it has been deflected from that position. As a consequence if the user wishes to apply more force to the guard, for example to stretch the skin, this can be done without increasing the force of the blades on the skin. This could not be achieved by prior art razors.

In addition, the handle can be arranged so as not to obstruct flow of rinsing water through the blade unit and in accordance with a preferred feature, with the blade unit in the rest position, the handle is located entirely forwardly of a plane containing the edge of the blade adjacent the guard and perpendicular to said plane containing said edge and the guard surface. (For convenience the latter plane is hereinafter referred to as the "top plane" of the blade unit.) Ideally the handle is located entirely forwardly of a plane containing the trailing edge of the guard surface and perpendicular to the top plane of the blade unit.

The blade unit may be pivotally movable through an angle in the range of  $35^{\circ}$  to  $50^{\circ}$ , preferably  $40^{\circ}$  to  $45^{\circ}$ , from the rest position to a limit position, and both these end positions are conveniently defined by stops provided on the blade unit for abutment by the handle connection pieces.

In a specific embodiment of the invention, when the blade unit is in the rest position, the top plane thereof is at  $20^{\circ}$ - $30^{\circ}$  to the longitudinal axis of the handle, i.e. the axis of that part of the handle intended to be held in the hand. Furthermore, the pivot axis is

1.0-2.0 mm, preferably 1.25-1.75 mm, from the leading blade edge and 0.50-1.00 mm below the guard surface.

In accordance with a second aspect the invention provides a razor comprising a blade unit, and a handle mounting the blade for pivotal movement, from a rest position, the handle being connected to the blade unit by a pair of opposed connection pieces engaging the blade unit at the respective ends thereof, characterised in that the connecting pieces are urged resiliently into abutment with cam faces on the blade unit whereby to oppose displacement of the blade unit from the rest position and to apply a restoring force for returning the blade unit to the rest position after having been pivoted away therefrom.

Conveniently the handle has a pair of wings with tips forming the connection pieces and biased apart by the wings. In one embodiment, the handle is intended to be used with blade units in the form of replaceable cartridges, and the wings are hinged elements acted upon by spring means incorporated in the handle structure. In another embodiment the wings are integral with the handle and are themselves resilient. In both cases the wing tips comprise pivot elements, particularly pins or stub axles, which cooperate with complementary means on the blade unit to define the pivotal connection between the handle and blade unit. Adjacent their pivot elements, the wing tips have edge surfaces which abut the cam faces. It will be appreciated that by virtue of the wing tips a simple pivot assembly with return spring is obtained. Furthermore, the blade unit can be made easily detachable by squeezing the wings together.

A full understanding of the invention will be gained from the following detailed description of some specific embodiments which are given by way of non-limiting example only, reference being made to the accompanying drawings in which:-

Figure 1 is a side view of a razor head portion, the blade unit thereof being shown in transverse cross section;

Figure 2 is a section taken along the line A-A in Figure 1;

Figure 3 is a partial view of the underside of the blade unit;

Figure 4 is a section taken along the line B-B of Figure 3; and

Figure 5 is an exploded perspective view of an alternative embodiment.

The safety razor illustrated in Figures 1 and 2 has a handle 1 and a blade unit or cartridge 2, the razor being of the type in which the cartridge is intended to be discarded when the blades have become dulled and to be replaced on the handle by a new cartridge with sharp blades. The blade cartridge includes a housing or frame 4 in which are received at least one blade, there being three blades 6 in the specific example shown, and a lubricating strip 8 which forms the cap of the assembly. The frame includes an integral guard member defining a guard surface 10 extending along the cartridge parallel to the leading blade edge 12. Of course, the guard surface could be defined instead by a separate member carried by the cartridge frame. At the opposite ends of the frame and adjacent the front edge thereof there are defined respective sockets 14 for reception of handle connection pieces. Each socket includes a longitudinally inwardly directed cam face 16. As best seen from Fig. 3, the cam faces are inclined to converge towards each other in the direction towards the rear of the cartridge. Immediately above each cam face is an aperture 18 directed longitudinally outwardly from the socket and having a centre which defines the pivot axis C of the cartridge when mounted on the handle.

The razor handle includes a main part, only partially shown, intended to be grasped in the hand, and a neck in the form of a yoke with opposed arms having grooves or slots in which respective wings 20 are mounted by pivots 22. The free ends or tips of the wings are biased apart by leaf springs 24 incorporated in the handle and acting on the respective wings. As shown the wings include finger grip portions 25 intermediate their ends for squeezing the wings together against the action of the springs. The wing tips engage in the respective sockets 14 of the cartridge and have stub axles 26 which engage in the apertures 18 to form the pivot between the handle and blade unit and hence define the pivot axis C. The springs 24 acting on the wings urge the stub axles 26 into correct engagement in the apertures 18, but also press abutment edges 28 on the wing tips into contact with the cam faces 16. The sockets 14 have front and rear surfaces which serve as stops for the wing tips and thereby limit the pivotal movement of the cartridge with respect to the handle.

Due to the inclination of the cam faces 16, the wing tips bias the cartridge to a rest position, shown in Fig. 1, in which the wing tips engage the front stop surfaces of the sockets 14. When the cartridge is pivotally displaced away from this position, e.g. during shaving, the cam faces 16 cam the wing tips inwardly towards each other and a gradually increasing restoring force tending to return the cartridge to the rest position is generated.

As may be seen clearly from Fig. 1, the axis C about which the cartridge pivots with respect to the handle underlies the guard surface 10, as seen in a direction perpendicular to the top plane P of the cartridge containing the guard surface and the leading

blade edge 12. The displacement between the axis C and the leading blade edge, measured in the plane P, is substantially equal to 1.5 mm and the depth of the axis C below the surface 10 is substantially equal to 0.70 mm. In the rest position, the top plane P is at an angle substantially equal to  $25^{\circ}$  relative to the longitudinal axis of the main handle part. The rear faces of the sockets 14 limit the maximum pivotal displacement of the cartridge to an angle of substantially  $43^{\circ}$ , as indicated in broken line in Fig. 1. When the cartridge is in the rest position, the rear of the cartridge is unencumbered by the handle, at least in the region of the blades, i.e. between the guard and cap. In particular, the handle is located entirely forwardly of a plane containing the trailing edge of the guard surface 10 and perpendicular to the top plane P.

To detach the cartridge, the handle wings 20 are squeezed together, e.g. between the thumb and forefinger. The stub axles 26 are retracted from the apertures 18 and the wing tip can then be withdrawn from the sockets 14. A fresh cartridge can then be mounted on the handle by the reverse procedure.

The embodiment shown in Fig. 5 is essentially the same as described above except that the wing tips with the stub axles and cam abutment edges are formed at the ends of integral wings 30 provided by a one-piece bifurcated handle. In this case the wings are resilient and their elasticity is relied upon to press the wing tips against the cam faces 16 of the cartridge.



CLAIMS:-

1. A safety razor comprising a blade unit (2) including a guard and at least one blade (6), and a handle (1) mounting the blade unit for pivotal movement in one direction only from a rest position, characterised in that the pivot axis (C) underlies the guard surface (10) as seen in a direction normal to a plane (P) containing the guard surface (10) and the blade edge (12) adjacent thereto.
2. A razor according to claim 1, wherein, when the blade unit is in the rest position, the handle is located entirely forwardly of a plane containing the leading blade edge (12) and perpendicular to said plane (P) containing the guard surface and adjacent blade edge.
3. A razor according to claim 1, wherein, when the blade unit is in the rest position, the handle is located entirely forwardly of a plane containing the trailing edge of the guard surface (10) and perpendicular to said plane (P) containing the guard surface and adjacent blade edge.
4. A razor according to claim 1, 2 or 3, wherein the blade unit (2) is pivotable through an angle in the range of  $35^{\circ}$  to  $50^{\circ}$ , preferably  $40^{\circ}$  to  $45^{\circ}$ , from the rest position.
5. A razor according to any one of claims 1 to 4, wherein, when the blade unit is in the rest position, said plane (P) containing the guard surface and the adjacent blade edge lies at an angle of  $20^{\circ}$  to  $30^{\circ}$  to the longitudinal axis of the handle.

6. A razor according to any one of claims 1 to 5, wherein the pivot axis (C) is from 1.0 to 2.0 mm in front of the leading blade edge (12), measured in said plane (P) containing the guard surface and blade edge.

7. A razor according to any one of claims 1 to 6, wherein the pivot axis (C) is 0.50 to 1.00 mm below the guard surface.

8. A safety razor comprising a blade unit (2), and a handle (1) supporting the blade unit for pivotal movement from a rest position, the handle being connected to the blade unit by a pair of opposed connection pieces (20) engaging the blade unit at the respective ends thereof, characterised in that said connection pieces (20) are urged resiliently into abutment with cam faces (16) on the blade unit (2) whereby to oppose displacement of the blade from the rest position and to apply a restoring force for returning the blade unit to the rest position.

9. A razor according to claim 8, wherein the handle has a pair of wings (20; 30) with tips forming the connection pieces and biased apart by the wings.

10. A razor according to claim 9, wherein the wing tips comprise pivot elements (26) engaged with complementary means (18) on the blade unit to define a fixed pivot axis (C) for the blade unit.

11. A razor according to claim 10, wherein the pivot elements are stud axles (26) engaged in complementary apertures (18) in the blade unit.

12. A razor according to claim 10 or 11, wherein the pivot element (16) of each tip is located adjacent to and projects beyond an edge surface (28) in contact with the blade unit cam face.

13. A razor according to any one of claims 9 to 12, wherein the wing tips are received in respective sockets (14) at the ends of the blade unit, the sockets having front and rear stop faces for abutment with the tips to limit the pivotal movement of the blade unit.


14. A razor according to any one of claims 9 to 13, wherein the wings (20) are hinged to the handle and acted upon by spring means (24) to urge the tips apart.

15. A razor according to any one of claims 9 to 13, wherein the wings (30) are resilient and serve as spring means to urge the tips apart.

16. A razor according to claim 15 wherein the wings (30) are integral with the handle.

17. A razor according to any one of claims 9 to 16, wherein the blade unit (2) is detachable from the handle by squeezing the wings together to disengage the wing tips (26) from the blade unit.

1/3

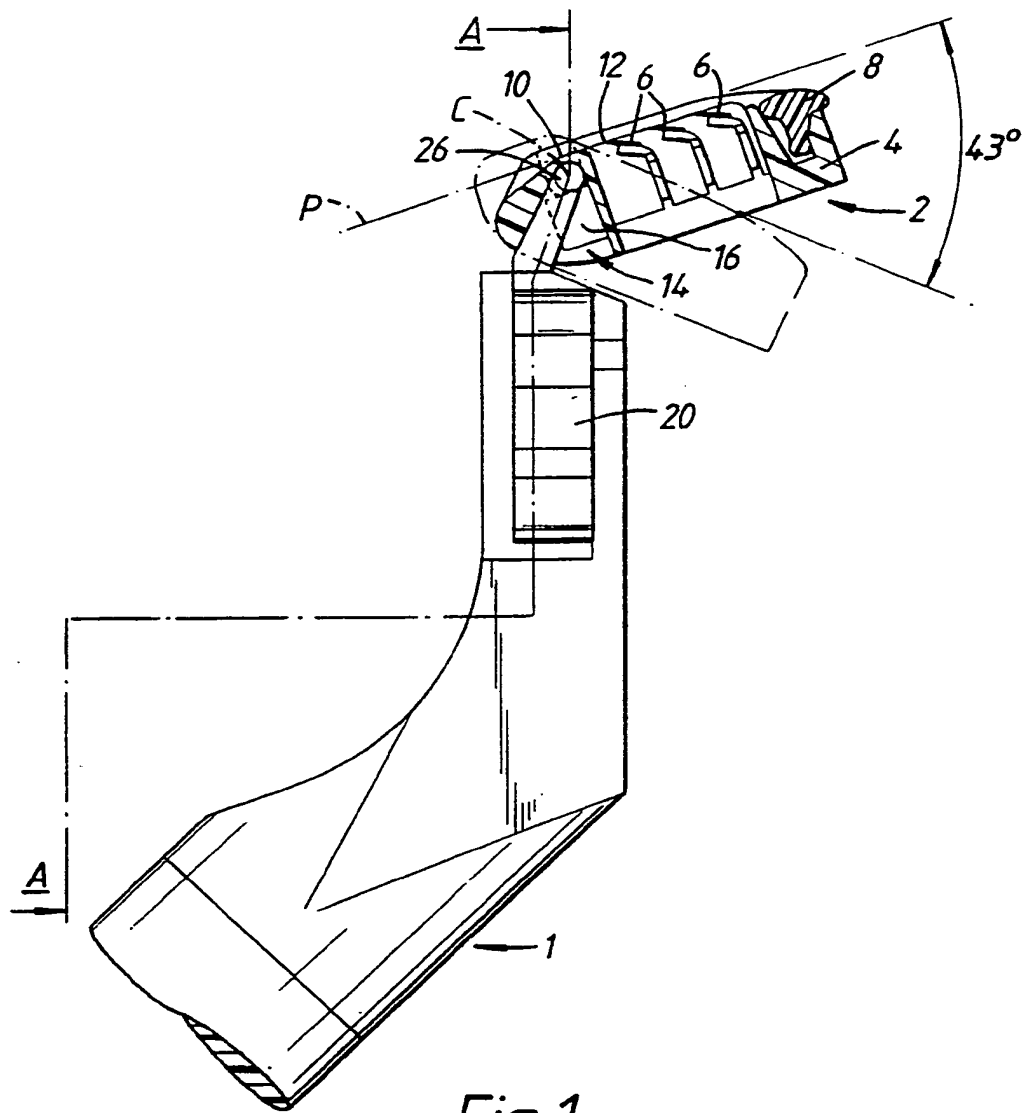

2/3




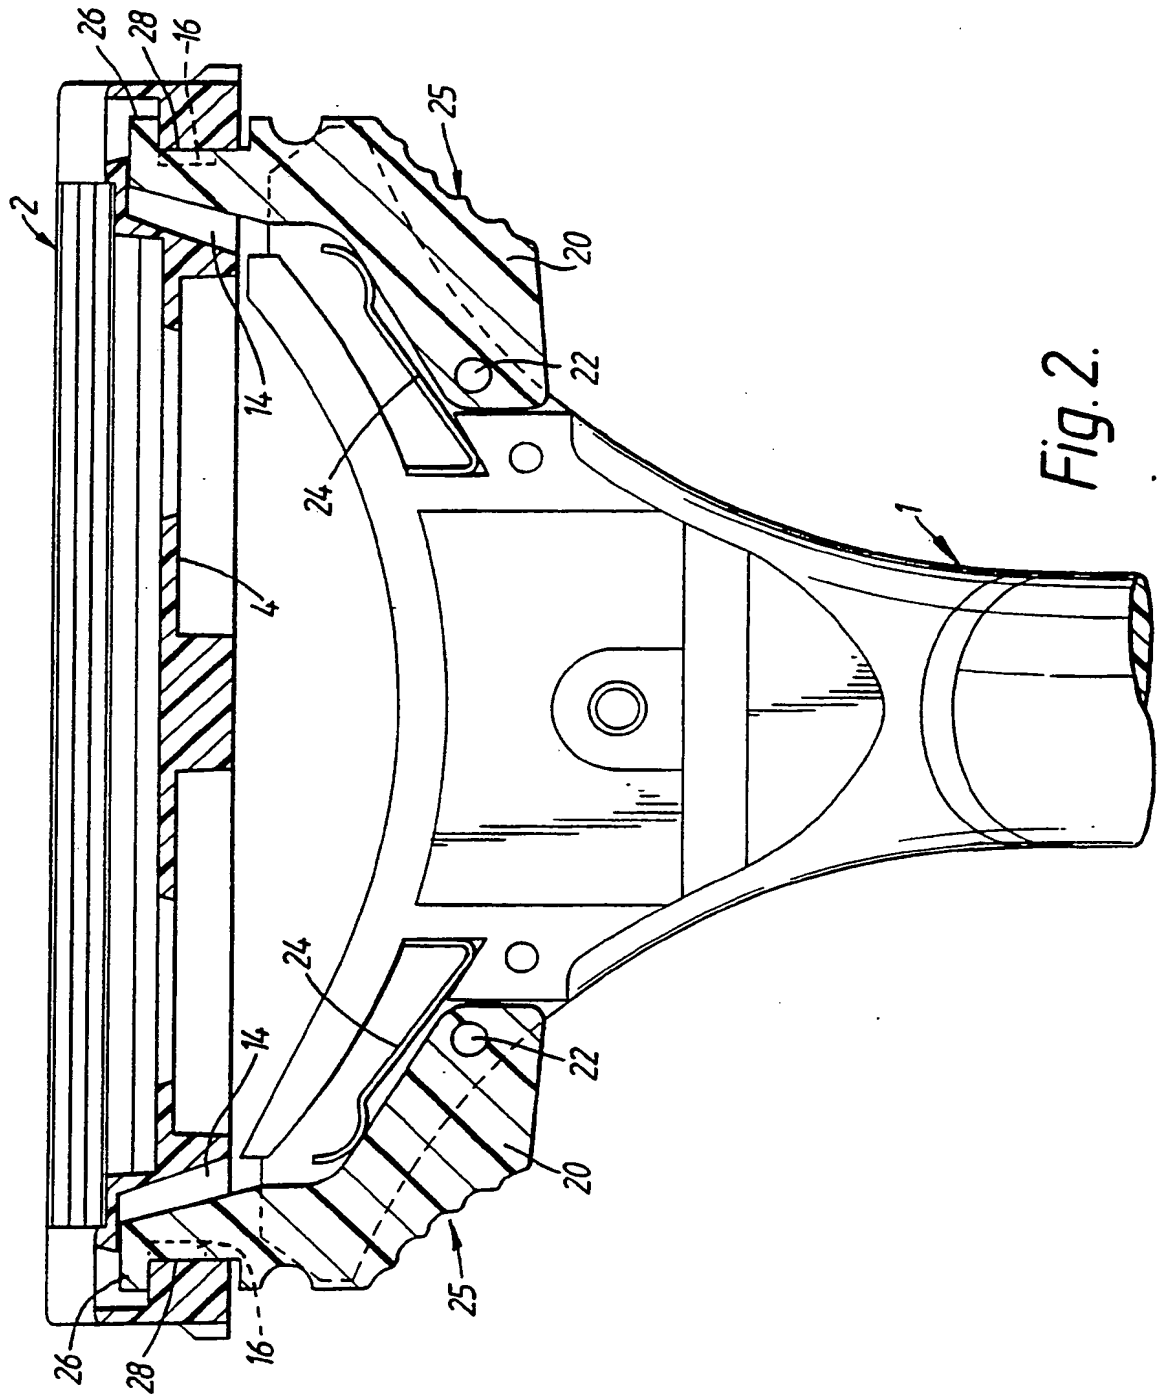


Fig. 2.

3/3

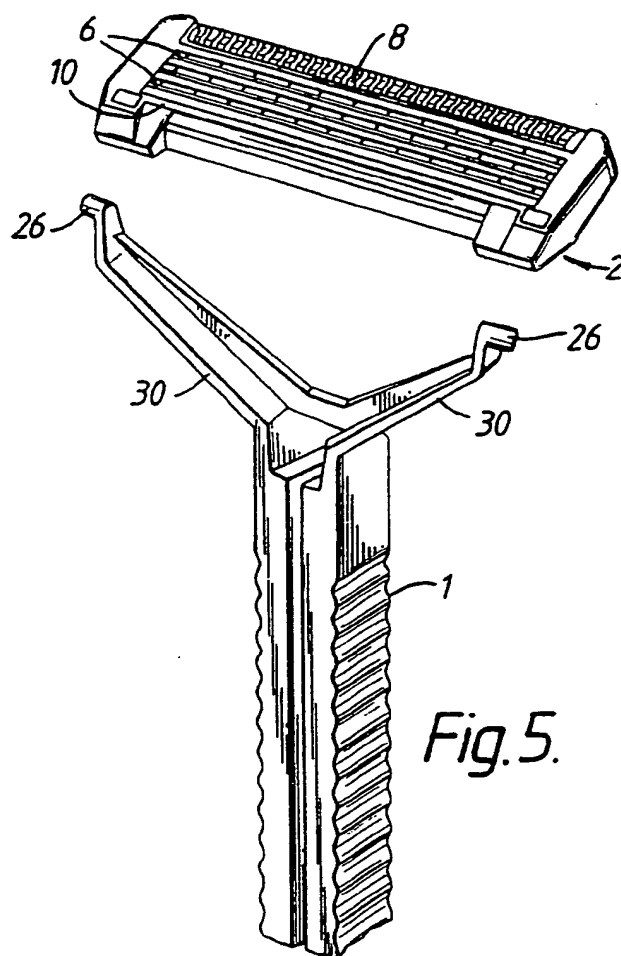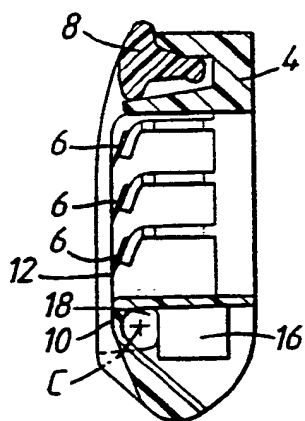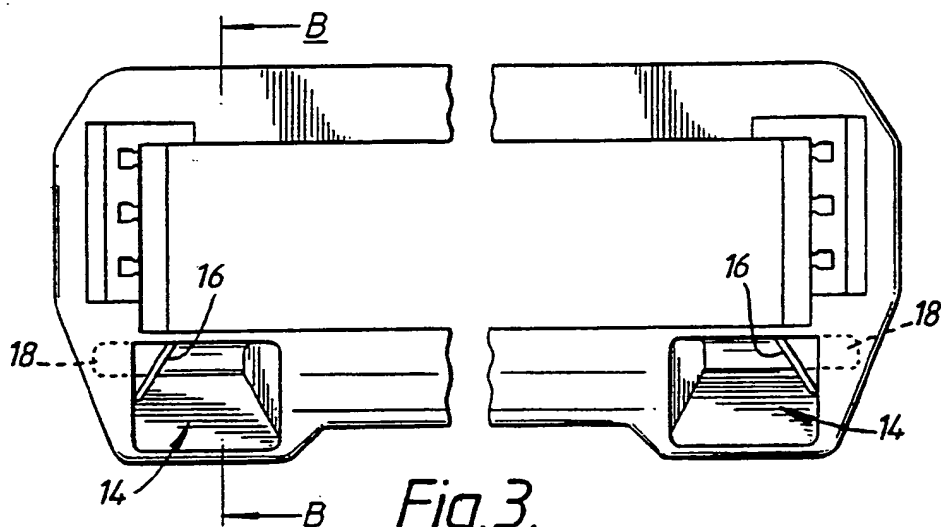

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 92/02169

**I. CLASSIFICATION OF SUBJECT MATTER** (if several classification symbols apply, indicate all)<sup>6</sup>

According to International Patent Classification (IPC) or to both National Classification and IPC

Int.Cl. 5 B26B21/22

**II. FIELDS SEARCHED**Minimum Documentation Searched<sup>7</sup>

Classification System

Classification Symbols

Int.Cl. 5

B26B

Documentation Searched other than Minimum Documentation  
to the Extent that such Documents are Included in the Fields Searched<sup>8</sup>**III. DOCUMENTS CONSIDERED TO BE RELEVANT<sup>9</sup>**

Category <sup>10</sup>	Citation of Document, <sup>11</sup> with indication, where appropriate, of the relevant passages <sup>12</sup>	Relevant to Claim No. <sup>13</sup>
X	EP,A,0 020 816 (THE GILLETTE COMPANY) 7 January 1981 see page 3, line 22 - page 7, line 15; figures	8
Y	---	9-12, 14, 17
Y	US,A,4 492 025 (C. F. JACOBSON) 8 January 1985 see column 4, line 1 - column 5, line 16; figures 6-10	9-12, 14, 17
Y	---	1-3
A	EP,A,0 357 821 (WILKINSON SWORD GMBH) 14 March 1990 see column 3, line 28 - column 6, line 5; figures 3-6	4-15, 17
	---	-/--

<sup>10</sup> Special categories of cited documents : <sup>10</sup><sup>10</sup> "A" document defining the general state of the art which is not considered to be of particular relevance<sup>10</sup> "E" earlier document but published on or after the international filing date<sup>10</sup> "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)<sup>10</sup> "O" document referring to an oral disclosure, use, exhibition or other means<sup>10</sup> "P" document published prior to the international filing date but later than the priority date claimed<sup>10</sup> "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention<sup>10</sup> "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step<sup>10</sup> "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.<sup>10</sup> "&" document member of the same patent family**IV. CERTIFICATION**

Date of the Actual Completion of the International Search

29 JANUARY 1993

Date of Mailing of this International Search Report

11. 02. 93

International Searching Authority

EUROPEAN PATENT OFFICE

Signature of Authorized Officer

RAVEN P.

III. DOCUMENTS CONSIDERED TO BE RELEVANT (CONTINUED FROM THE SECOND SHEET)		
Category *	Citation of Document, with indication, where appropriate, of the relevant passages	Relevant to Claim No.
Y	NL,A,7 603 885 (N. V. PHILIPS' GLOEILAMPENFABRIEKEN) 17 October 1977 see page 1, line 28 - page 2, line 22; figures ----	1-3
A	US,A,4 459 744 (M. G. ESNARD) 17 July 1984 see column 4, line 18 - line 35; figure 1 ----	15,16
A	US,A,4 392 303 (J. T. CIAFFONE) 12 July 1983 see column 2, line 41 - line 55; figures -----	15,16



**ANNEX TO THE INTERNATIONAL SEARCH REPORT  
ON INTERNATIONAL PATENT APPLICATION NO.**

GB 9202169  
SA 66893

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information. 29/01/93

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A-0020816	07-01-81	US-A- 4253236	03-03-81
		US-A- 4253237	03-03-81
		US-A- 4253235	03-03-81
		CA-A- 1113704	08-12-81
		CA-A- 1113703	08-12-81
		CA-A- 1113702	08-12-81
		EP-A- 0020815	07-01-81
US-A-4492025	08-01-85	CA-A- 1225518	18-08-87
		EP-A, B 0157804	16-10-85
		JP-T- 60502238	26-12-85
		WO-A- 8501466	11-04-85
EP-A-0357821	14-03-90	DE-U- 8811355	20-10-88
		AU-B- 620642	20-02-92
		AU-A- 4116789	15-03-90
		JP-A- 2107290	19-04-90
		US-A- 4970784	20-11-90
NL-A-7603885	17-10-77	None	
US-A-4459744	17-07-84	None	
US-A-4392303	12-07-83	AU-B- 532986	20-10-83
		AU-A- 6553480	30-07-81
		BE-A- 886917	16-04-81
		CA-A- 1158036	06-12-83
		DE-A, C 3049514	10-09-81
		FR-A, B 2472450	03-07-81
		GB-A, B 2066134	08-07-81
		JP-C- 1491156	07-04-89
		JP-A- 56100091	11-08-81
		JP-B- 63039274	04-08-88
		NL-A- 8006639	03-08-81
		SE-A- 8008945	01-07-81

EPO FORM P0079

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**THIS PAGE BLANK (USPTO)**